

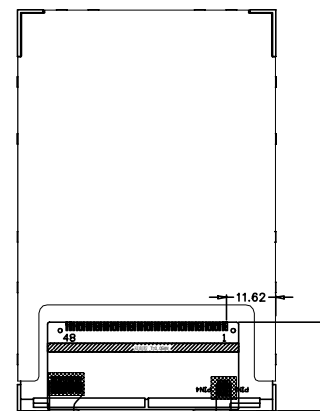
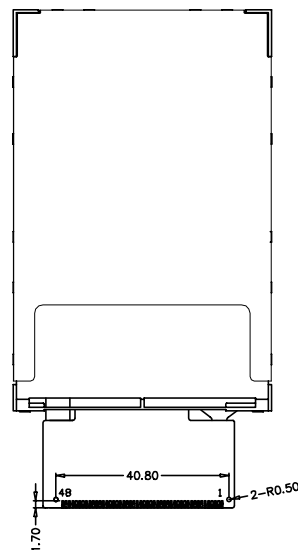




弯折示意
图
展开出货

No	PIN NAME	No	PIN NAME
1	YU	25	DB10
2	XL	26	DB11
3	YD	27	DB12
4	XR	28	DB13
5	VDD	29	DB14
6	IDVCC	30	DB15
7	TE	31	DB16
8	CSX	32	DB17
9	DCX	33	DB18
10	WRX/SCL	34	GN
11	RD	35	PCLK
12	SDA	36	HSYNC
13	SDD	37	VSYSNC
14	GND	38	RESET
15	DB0	39	IM2
16	DB1	40	IMI
17	DB2	41	IMO
18	DB3	42	LED A
19	DB4	43	LEDAK
20	DB5	44	LEDB
21	DB6	45	LEDBK
22	DB7	46	LEDC
23	DB8	47	LEDCB
24	DB9	48	LEDD

- 1.DISPLAY TYPE: 3.95"TFT
- 2.VIEWING DIRECTION: 12 O'CLOCK
- 3.LCD DRIVE IC: IVO+ST7796S
- 4.POLARIZER MODE: TRANSMISSIVE/POSITIVE
- 5.OPERATING TEMP: -10° C~+60° C
- 6.STORAGE TEMP: -20° C~+70° C
- 7.UNMARKER TOLERANCE: ± 0.20
- 8.REQUIREMENTS ON ENVIRONMENTAL PROTECTION: RoHS



背光电路图

SHENZHEN ELECROW CO. , LTD.						DRG DATE	2019.01.08
						DRAWING	
TITLE.	LCM OUTLINE	REV.	UNIT	SIZE	 (3)	CHECK	
MODEL.		A	mm	A4		APPROVE	