



EMC TEST REPORT

Product Name: CrowPi 3

Trade mark: /

Model No.: SER14003P

S/N: /

Report No.: CTB25082615603E01

Applicant: Shenzhen Elecrow Limited

Address: Elecrow, 5th Floor, Fengze Building B, Nanchang Huafeng Industrial Park,
Hangcheng Street Hangkong Road, Baoan District, Shenzhen city, China

Manufacturer: Shenzhen Elecrow Limited

Address: Elecrow, 5th Floor, Fengze Building B, Nanchang Huafeng Industrial Park,
Hangcheng Street Hangkong Road, Baoan District, Shenzhen city, China

Prepared by: Shenzhen CTB Testing Technology Co., Ltd.

Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an
District, Shenzhen, Guangdong, China

Sample No.: 25082615603

Date of Receipt: Sep. 23, 2025

Date of Test(s): Sep. 24, 2025 ~ Sep. 29, 2025

Date of Issue: Oct. 30, 2025

Test Standard(s): 47 CFR Part 15 Subchapter B, ANSI C63.4: 2014

Test Result: Pass

In the configuration tested, the EUT complied with the standards specified above.

Compiled by:

Reviewed by:

Approved by:

Blake Cai

Bin Mei

Rita Xiao

Blake Cai

Bin Mei

Rita Xiao

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "★" indicates the testing items were fulfilled by subcontracted lab. "×" indicates the items are not in CNAS accreditation scope.

Table of Contents

1. Description of version	3
2. Test summary	4
3. Measurement uncertainty	5
4. General information	6
4.1. Description of EUT	6
4.2. Description of accessory device	6
4.3. Test conditions	7
4.4. Block diagram of EUT configuration	7
4.5. Operating condition of EUT	7
5. List of Test and Measurement Instruments	8
6. Conducted Emission	10
6.1. Limit	10
6.2. Test setup	10
6.3. EMI test receiver setup	10
6.4. Test procedure	10
6.5. Test results	11
7. Radiated emissions	13
7.1. Limit	13
7.2. Test setup	13
7.3. EMI test receiver setup and spectrum analyzer setup	14
7.4. Test procedure	14
7.5. Corrected Amplitude & Margin Calculation	14
7.6. Test results	15
8. Photographs of test setup	19
9. Photographs of EUT	21



1. Description of version

Report No.	Issue Date	Description	Approved
CTB25082615603E01	Oct. 30, 2025	Original	Valid

2. Test summary

Test procedures according to the technical standards:

Standard	Test Item	Test Result
§15.107	Conducted Emission	PASS
§15.109	Radiated Emission	PASS

3. Measurement uncertainty

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %

Test Item	Frequency	Expanded Uncertainty (U_{Lab})
No.1 Conducted Emission	150 kHz to 30 MHz	± 3.1 dB
No.2 Conducted Emission	150 kHz to 30 MHz	± 3.2 dB
Radiated Emission	30 MHz to 1000 MHz	± 4.1 dB
Radiated Emission	1000 MHz to 6000 MHz	± 4.8 dB

4. General information

4.1. Description of EUT

Product name	CrowPi 3
Trade mark	/
Model No.	SER14003P
Serial Model No.	/
Model Difference	/
Rated Power	/
Rated Voltage& current	DC 5V
Highest Internal Frequency	>108MHz
Configuration	<input checked="" type="checkbox"/> Table-top <input type="checkbox"/> Floor-standing
Classification	<input type="checkbox"/> Class A <input checked="" type="checkbox"/> Class B
The highest frequency of the internal sources of the EUT	<input type="checkbox"/> below 1.705 MHz, the measurement shall only be made up to 30 MHz. <input type="checkbox"/> between 1.705 MHz and 108 MHz, the measurement shall only be made up to 1 GHz. <input type="checkbox"/> between 108 MHz and 500 MHz, the measurement shall only be made up to 2 GHz. <input type="checkbox"/> between 500 MHz and 1 GHz, the measurement shall only be made up to 5 GHz. <input checked="" type="checkbox"/> above 1 GHz, the measurement shall be made up to 5th harmonic of the highest frequency or 40 GHz, whichever is lower.
Adapter Information	Model No.: XS-GaN-27WUSB-C Power Supply EU Input: AC 100-240V 50/60Hz 0.8A Max Output: 5.1V---5A 25.5W, 9V---3A 27W, 12V---2.25A 27W, 15V---1.8A 27W

Note: The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or the User's Manual.

4.2. Description of accessory device

Description	Manufacturer	Model	Specification	Note
Monitor	AOC	238LM00026	/	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB
Monitor	ASUS	VG28U	4K	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB
Mouse	DELL	KB216t	/	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB
Keyboard and Mouse Combo	/	CRU12300S	/	<input checked="" type="checkbox"/> Applicant <input type="checkbox"/> CTB
Laptop	Lenovo	21CU-A0F0CD	/	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB


External I/O Cable

Cable Description	Shielded Type	Ferrite Core	Length(m)	Note
HDMI Cable	<input checked="" type="checkbox"/> Shielded <input type="checkbox"/> Non-shielded	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB
RJ45 Cable	<input checked="" type="checkbox"/> Shielded <input type="checkbox"/> Non-shielded	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2	<input type="checkbox"/> Applicant <input checked="" type="checkbox"/> CTB

4.3. Test conditions

Temperature: 15-25°C
Relative Humidity: 30-60 %
Atmospheric pressure: 800hPa-1060hPa

4.4. Block diagram of EUT configuration

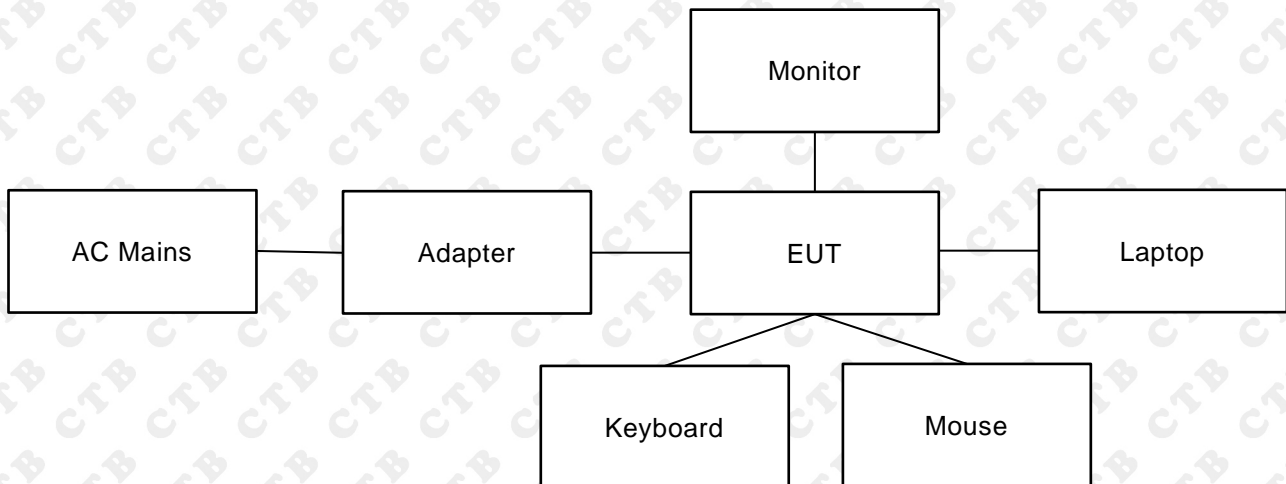

4.5. Operating condition of EUT

The test system was pre-tested based on the consideration of all possible combinations of EUT operation modes according to test plan. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively. All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, (*)the worst data were recorded and reported.

Pretest Test Mode	Description	Test Voltage
Mode 1*	Working	AC 120V/60Hz

Conducted emission test		
Final Test Mode	Description	Test Voltage
Mode 1*	Working	AC 120V/60Hz

Radiated emission test		
Final Test Mode	Description	Test Voltage
Mode 1*	Working	AC 120V/60Hz

5. List of Test and Measurement Instruments

No.1 Continuous disturbance						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	843 Shield Room	C/ R/ T	843	/	/	2027/6/21
2	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2026/5/21
3	Pulse limiter	ROHDE&SCHWARZ	ESH3-Z2	0357.8810.54-1 02700-NB	/	2026/5/21
4	EMI TEST RECEIVER	R&S	ESCI	100428	V4.42.SP3	2026/5/21
5	Coaxial cable	Agilent	UCE500-SMNM-1. 5M	/	/	2026/5/21
6	ISN	Schwarzbeck	NTFM8158	183	/	2026/6/17
7	ISN	Schwarzbeck	CAT5 8158	473	/	2026/6/17
8	Voltage Probe	Schwarzbeck	TK 9420	01189	/	2026/9/18
9	EMI test software	Frad	EZ-EMC	Ver/ EMC-con3A1/1	/	/
10	Current Probe	FCC	F-52B	199453	/	2026/5/23

Radiated emission(No.1 Chamber)						
No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware version	Calibrated until
1	966 Chamber	C/ R/ T	966	/	/	2027/6/21
2	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2026/6/1
3	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2026/6/28
4	Preamplifier	Agilent	8449B	3008A01838	/	2026/6/3
5	Amplifier	HP	8447E	2945A02747	/	2026/5/23
6	loop antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2026/6/1
7	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESPI	100362	RF_ATTEN_7 (104489/003)	2026/5/23
8	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2026/5/22
9	26.5G cable	ETS	RFC-SNS-100-N MS-80	/	/	2026/5/23
10	26.5G cable	ETS	RFC-SN-100-NM S-20	/	/	2026/5/23
11	26.5G cable	ETS	RFC-SNS-100-S MS-20	/	/	2026/5/23
12	26.5G cable	ETS	RFC-NNS-100-N MS-300	/	/	2026/5/23
13	EMI test software	Frad	EZ-EMC	Ver/ FA-03A2 RE	/	/

6. Conducted Emission

6.1. Limit

Except for Class A devices:


Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

Note: Decreases with the logarithm of the frequency.

For Class A devices:

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	79	66
0.5-30	73	60

6.2. Test setup

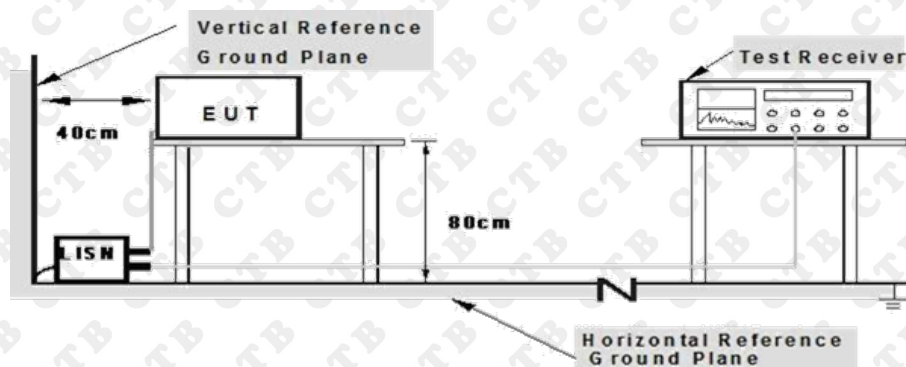

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

The setup of EUT is according with ANSI C63.4 measurement procedure. Specification used with FCC Part 15 limits.

6.3. EMI test receiver setup


Frequency Range	9kHz-30MHz
Resolution Bandwidth	200Hz (9kHz-150kHz) 9kHz (150kHz-30MHz)

6.4. Test procedure

1. Measurement was performed in shielded room, and instruments used were followed clause 4 of ANSI C63.4.
2. Detailed test procedure was following clause 7 of ANSI C63.4.
3. Frequency range 150kHz – 30MHz was checked and EMI receiver measurement bandwidth was set to 9 kHz.

6.5. Test results

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Line
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

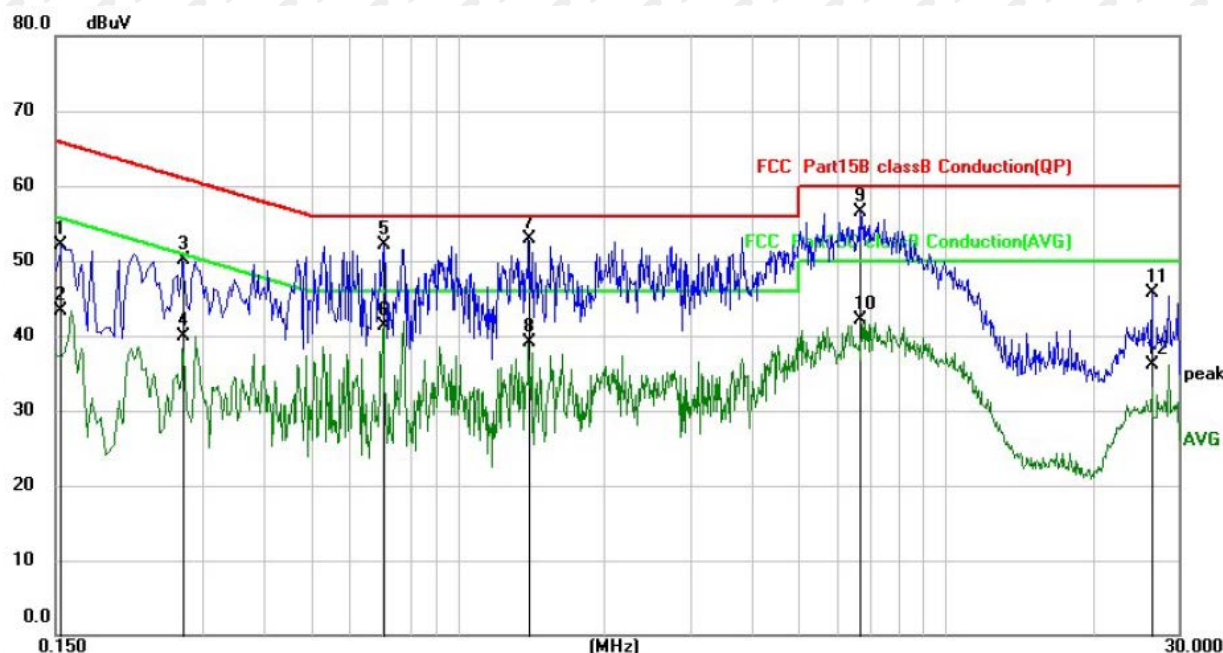


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector
1		0.1539	41.84	10.17	52.01	65.79	-13.78	QP
2		0.1539	33.22	10.17	43.39	55.79	-12.40	AVG
3		0.2740	39.99	10.18	50.17	61.00	-10.83	QP
4		0.2740	29.79	10.18	39.97	51.00	-11.03	AVG
5		0.7059	41.96	10.24	52.20	56.00	-3.80	QP
6		0.7059	30.97	10.24	41.21	46.00	-4.79	AVG
7	*	1.3979	42.48	10.39	52.87	56.00	-3.13	QP
8		1.3979	28.80	10.39	39.19	46.00	-6.81	AVG
9		6.6740	44.13	12.40	56.53	60.00	-3.47	QP
10		6.6740	29.66	12.40	42.06	50.00	-7.94	AVG
11		26.4660	23.83	21.84	45.67	60.00	-14.33	QP
12		26.4660	14.34	21.84	36.18	50.00	-13.82	AVG

Note: Result=Reading + Factor

Over Limit=Result - Limit

Temperature:	23℃	Relative Humidity:	54 %
Pressure:	101kPa	Phase :	Neutral
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

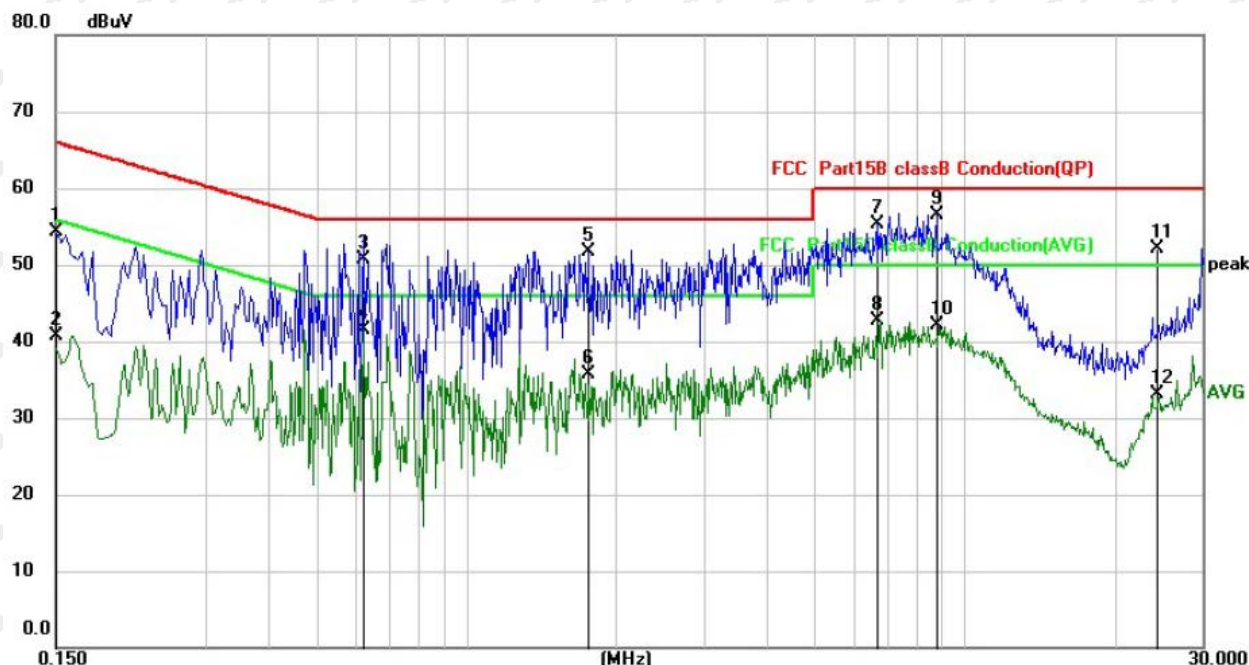

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	
		MHz	Level	Factor	ment			Detector
			dBuV	dB	dBuV	dBuV	dB	
1		0.1500	44.22	10.17	54.39	66.00	-11.61	QP
2		0.1500	30.62	10.17	40.79	56.00	-15.21	AVG
3		0.6219	40.42	10.22	50.64	56.00	-5.36	QP
4		0.6220	31.34	10.22	41.56	46.00	-4.44	AVG
5		1.7540	41.29	10.47	51.76	56.00	-4.24	QP
6		1.7540	25.25	10.47	35.72	46.00	-10.28	AVG
7		6.6860	42.94	12.41	55.35	60.00	-4.65	QP
8		6.6860	30.32	12.41	42.73	50.00	-7.27	AVG
9	*	8.8100	43.15	13.41	56.56	60.00	-3.44	QP
10		8.8100	28.66	13.41	42.07	50.00	-7.93	AVG
11		29.9180	29.13	23.00	52.13	60.00	-7.87	QP
12		29.9180	10.18	23.00	33.18	50.00	-16.82	AVG

Note: Result=Reading + Factor

Over Limit=Result – Limit

7. Radiated emissions

7.1. Limit

Except for Class A devices (at 3m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

For Class A devices (at 10m):


Frequency of emission (MHz)	Field strength (microvolts/meter)	
	(microvolts/meter)	(dB μ V/m)
30-88	90	39
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

7.2. Test setup

Radiated Emission Test Set-Up Frequency Below 1 GHz

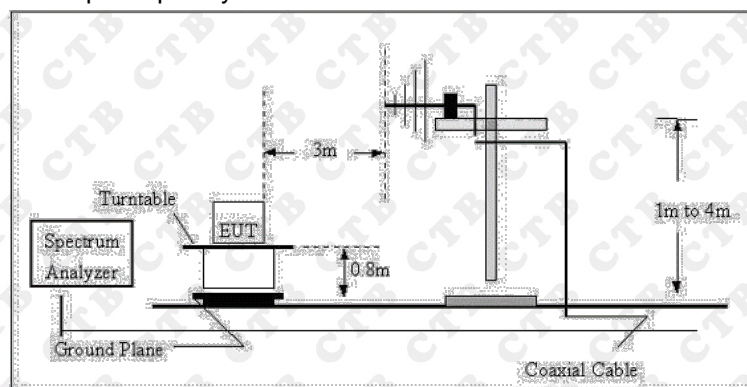

Radiated Emission Test Set-Up Frequency Above 1GHz

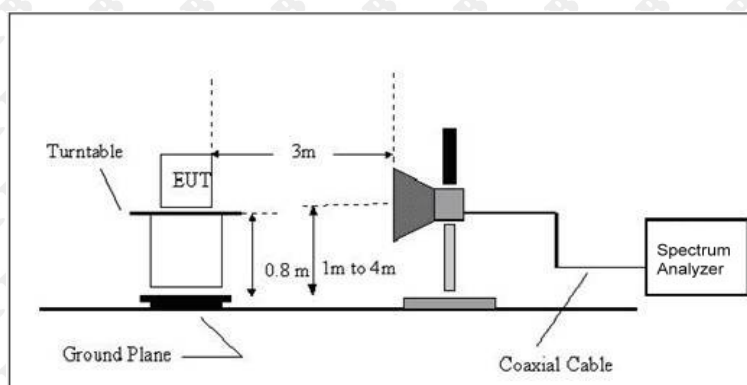

The radiated tests were performed in 3 meter Charmber test site, using the setup accordance with the ANSI C63.4:2014.

7.3. EMI test receiver setup and spectrum analyzer setup

During the radiated emission test, the EMI test receiver and Spectrum Analyzer were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector
30MHz-1000MHz	100kHz	300kHz	120kHz	QP
Above 1GHz	1MHz	3MHz	/	PK
	1MHz	10Hz	/	AVG

7.4. Test procedure

1. The measurement was performed in a semi-anechoic chamber, and instruments used were followed clause 4 of ANSI C63.4
2. Detailed test procedure was following clause 8 of ANSI C63.4.

7.5. Corrected Amplitude & Margin Calculation

1. The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

2. The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

7.6. Test results

Up to 1GHz


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV/m	dB/m	dB	Detector
1		147.9214	36.10	-4.60	31.50	43.50	-12.00	QP
2	*	195.8218	45.11	-5.95	39.16	43.50	-4.34	QP
3		287.9904	40.06	-3.06	37.00	46.00	-9.00	QP
4		650.7997	34.06	5.20	39.26	46.00	-6.74	QP
5		892.2907	30.26	9.44	39.70	46.00	-6.30	QP
6		982.6200	33.81	9.15	42.96	54.00	-11.04	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

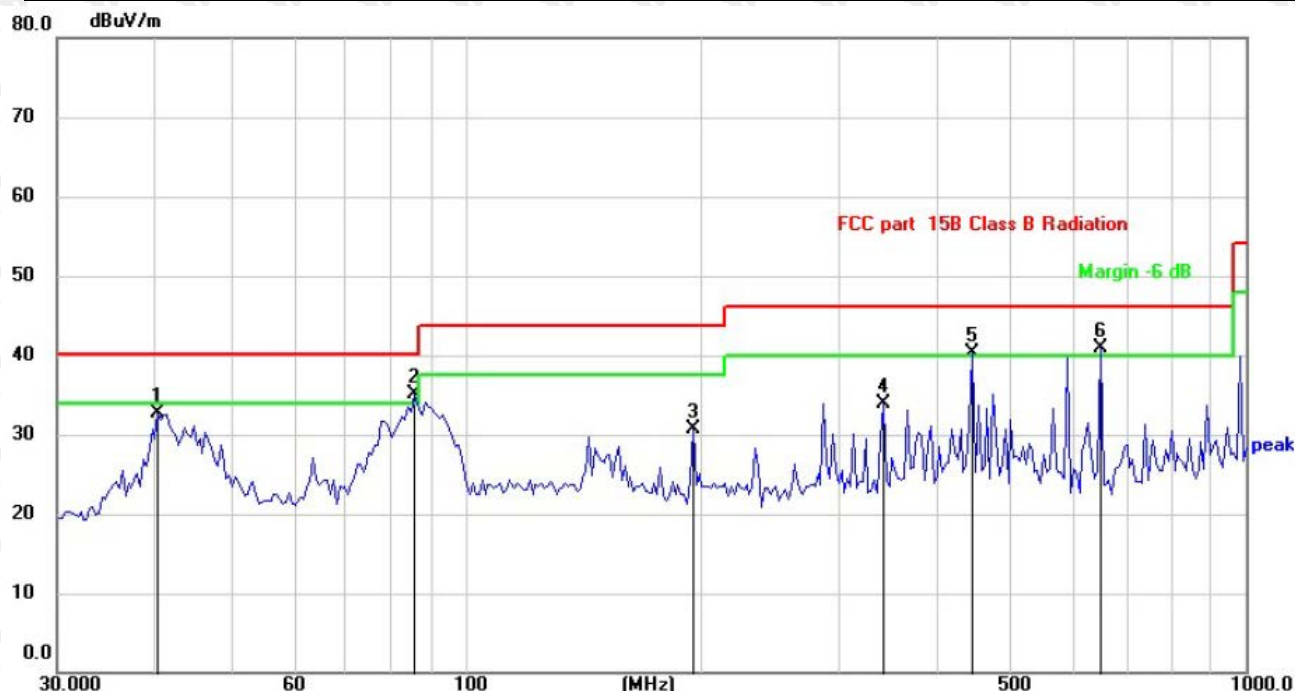


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		40.4170	38.62	-5.88	32.74	40.00	-7.26	QP
2	*	85.8983	43.35	-8.33	35.02	40.00	-4.98	QP
3		195.8216	36.64	-5.95	30.69	43.50	-12.81	QP
4		343.1800	35.75	-1.82	33.93	46.00	-12.07	QP
5	!	446.4139	40.38	-0.05	40.33	46.00	-5.67	QP
6	!	650.7997	35.78	5.20	40.98	46.00	-5.02	QP

Note: Result=Reading+Factor
Over Limit=Result-Limit

Above 1GHz


Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Horizontal
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

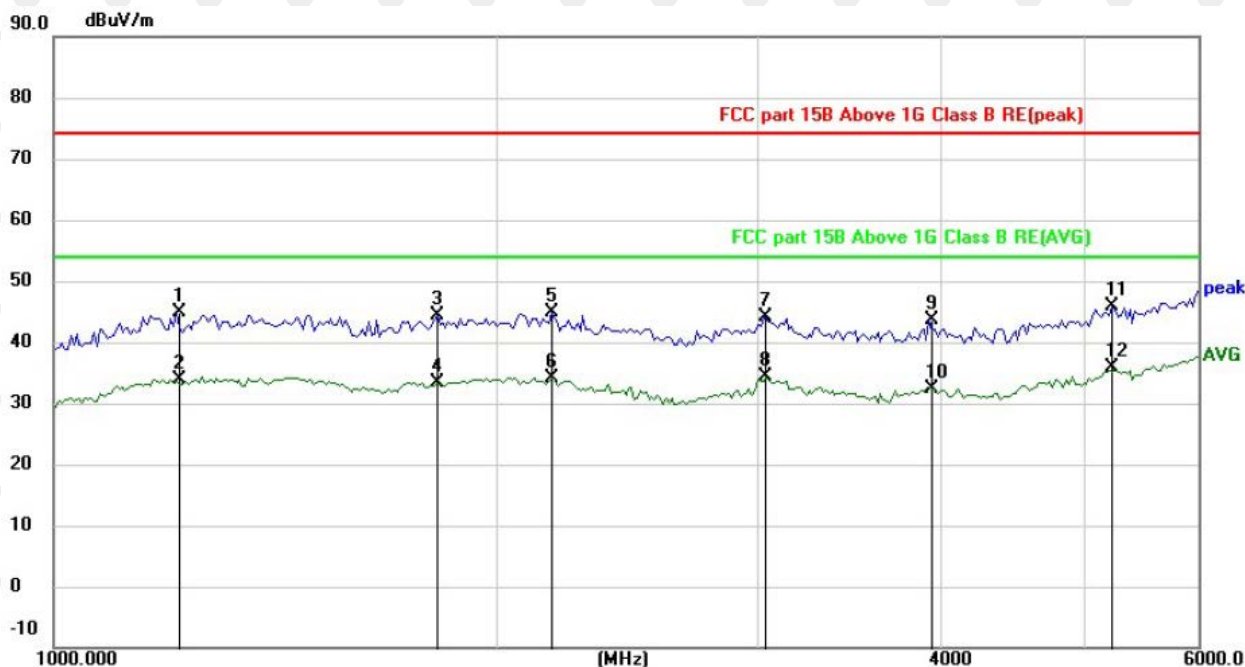

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over
		MHz	dBuV	dB	dBuV/m	dB/m	dB Detector
1		1212.415	48.19	-3.40	44.79	74.00	-29.21 peak
2		1212.415	37.26	-3.40	33.86	54.00	-20.14 AVG
3		1822.555	43.92	0.57	44.49	74.00	-29.51 peak
4		1822.555	32.71	0.57	33.28	54.00	-20.72 AVG
5		2180.197	41.97	2.86	44.83	74.00	-29.17 peak
6		2180.197	31.27	2.86	34.13	54.00	-19.87 AVG
7		3037.063	37.35	6.79	44.14	74.00	-29.86 peak
8		3037.063	27.49	6.79	34.28	54.00	-19.72 AVG
9		3938.091	33.52	10.04	43.56	74.00	-30.44 peak
10		3938.091	22.41	10.04	32.45	54.00	-21.55 AVG
11		5245.536	30.70	15.19	45.89	74.00	-28.11 peak
12	*	5245.536	20.65	15.19	35.84	54.00	-18.16 AVG

Note: Result=Reading+Factor
Over Limit=Result-Limit

Temperature:	23°C	Relative Humidity:	54 %
Pressure:	101kPa	Polarization :	Vertical
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

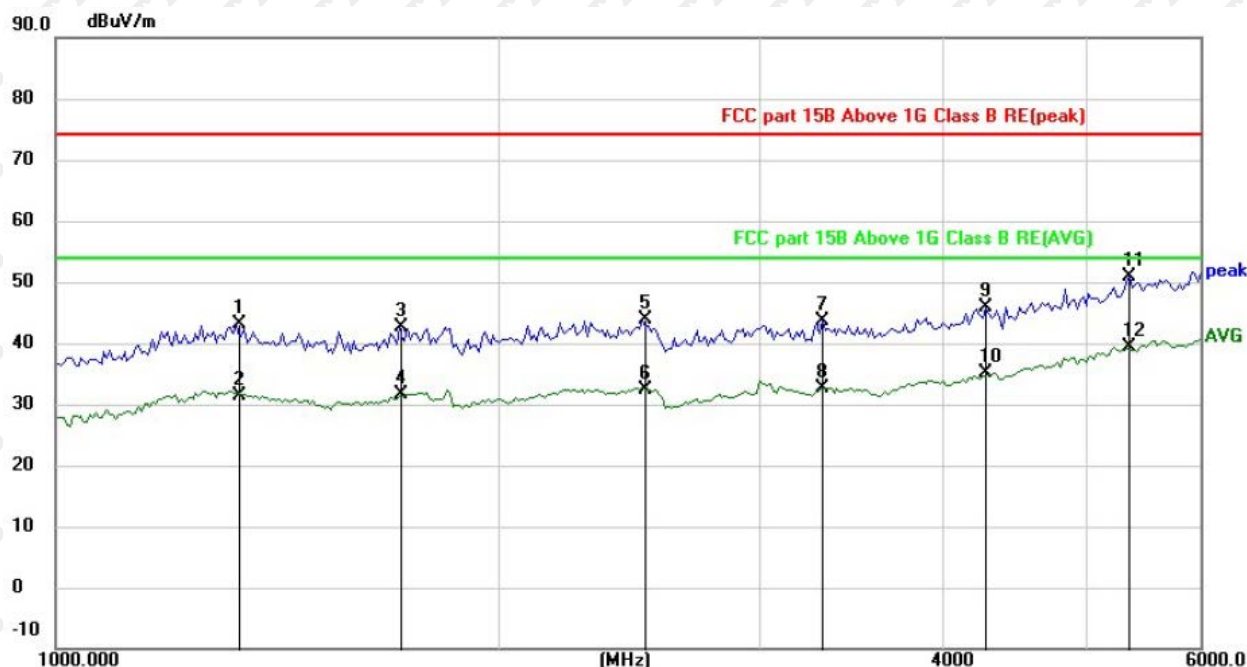


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		1326.047	45.88	-2.76	43.12	74.00	-30.88	peak
2		1326.047	34.18	-2.76	31.42	54.00	-22.58	AVG
3		1711.770	42.91	-0.34	42.57	74.00	-31.43	peak
4		1711.770	32.05	-0.34	31.71	54.00	-22.29	AVG
5		2504.970	39.63	4.37	44.00	74.00	-30.00	peak
6		2504.970	28.13	4.37	32.50	54.00	-21.50	AVG
7		3321.707	35.69	7.82	43.51	74.00	-30.49	peak
8		3321.707	24.70	7.82	32.52	54.00	-21.48	AVG
9		4287.932	34.45	11.50	45.95	74.00	-28.05	peak
10		4287.932	23.67	11.50	35.17	54.00	-18.83	AVG
11		5364.346	35.47	15.48	50.95	74.00	-23.05	peak
12	*	5364.346	23.83	15.48	39.31	54.00	-14.69	AVG


Note: Result=Reading+Factor
Over Limit=Result-Limit

8. Photographs of test setup

RE up to 1GHz

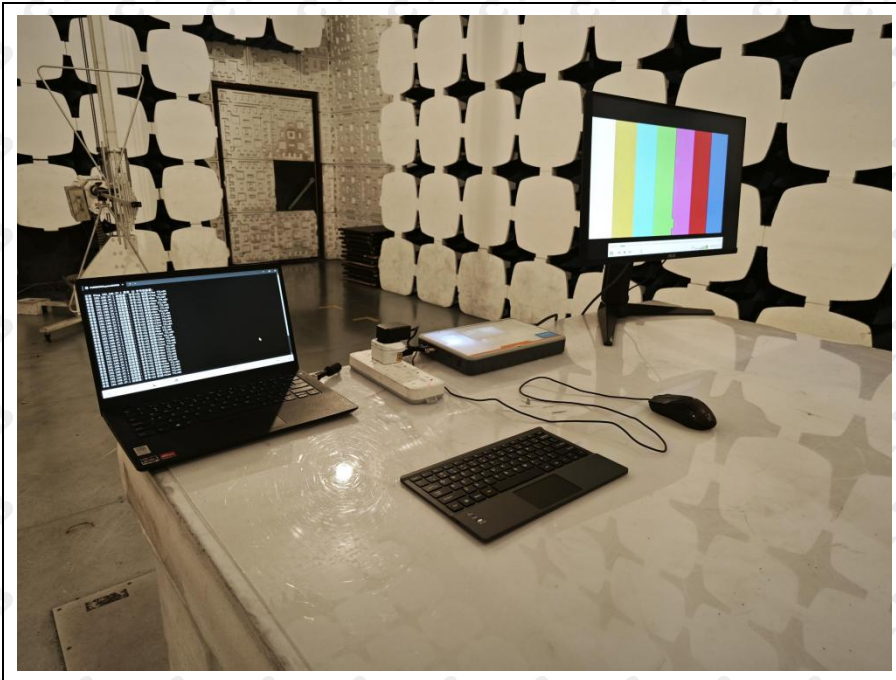

RE above 1GHz

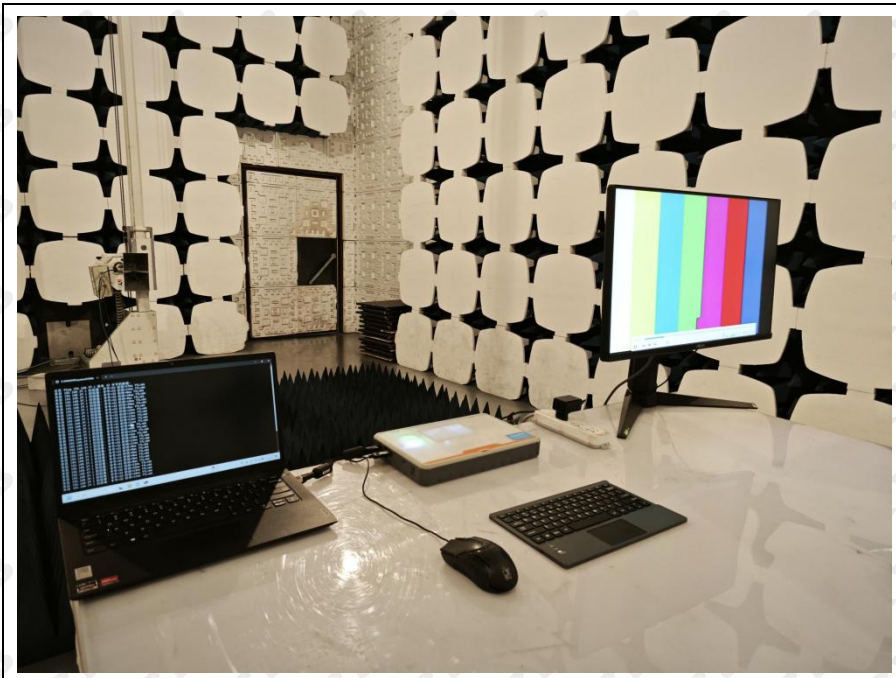

CE



9. Photographs of EUT


EUT photo 1



EUT photo 2



EUT photo 3

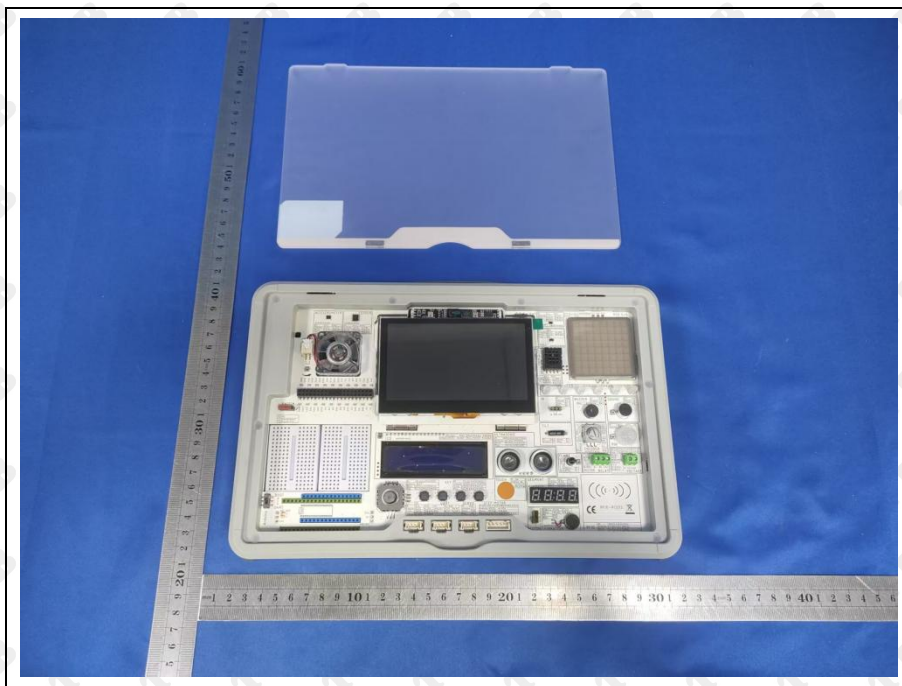

EUT photo 4



EUT photo 5



EUT photo 6




EUT photo 7



EUT photo 8



EUT photo 9

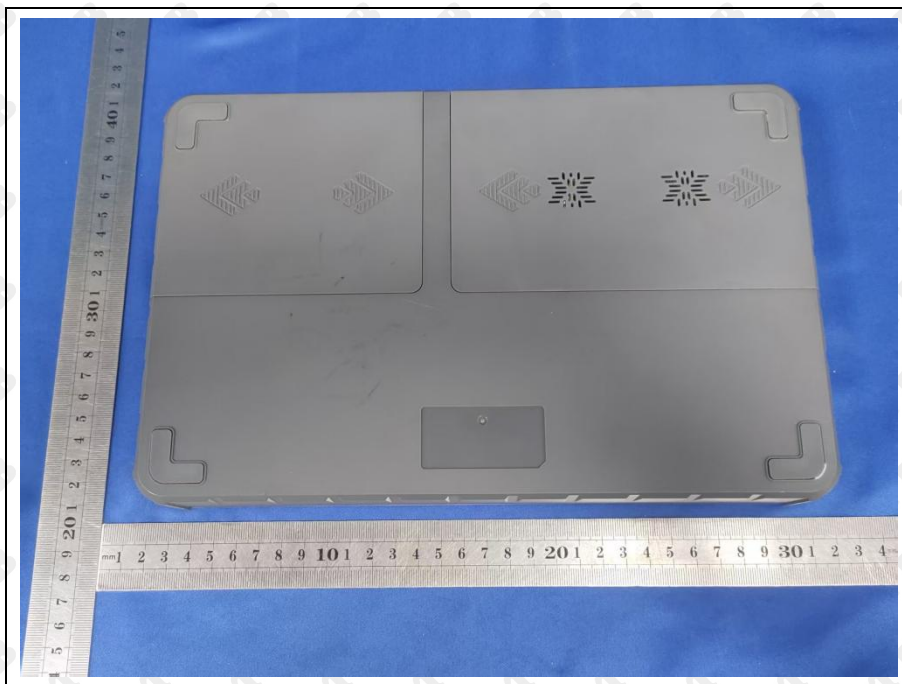

EUT photo 10



EUT photo 11



End of report